



## Digital bacteriological incubators "Incudigit"

NATURAL CONVECTION.  
 DIGITAL CONTROL AND DISPLAY OF TEMPERATURE AND TIME.  
 ADJUSTABLE TEMPERATURE FROM AMBIENT +5 °C UP TO 80 °C.  
 STABILITY:  $\pm 0.1$  °C, UP TO 37 °C. HOMOGENEITY:  $\pm 0.5$  °C, UP TO 37 °C.  
 SET ERROR:  $\pm 2\%$  OF THE WORKING TEMPERATURE, RESOLUTION 0.1 °C  
 INTERNAL TEMPERED GLASS DOOR.

**2000**  
**serie**




FEATURES, CONTROL PANEL, STANDARD AND ACCESSORIES (see pages 134 and 135).

### SAFETY:

OVER TEMPERATURE CUT OUT INCORPORATED ACCORDING TO THE EN.61010 STANDARD.  
 ADJUSTABLE SAFETY THERMOSTAT DIN 12880.3.1 FITTED.



Horizontal model. Part No. 2001616

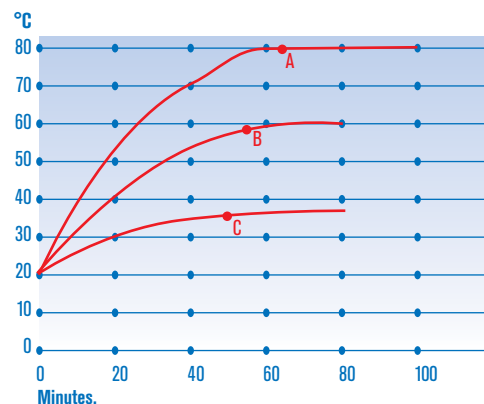

Performance graph of temperature and time.

A. Set at 80 °C: 1 h 12'

B. Set at 56 °C: 54'

C. Set at 37 °C: 48'

RS-232 Interface output for a computer, printer or USB adapter.

### STANDARD EQUIPMENT

2 shelves and 4 shelf guides.

### MODELS

Part No.	Capacity litres	Height / Width / Depth (interior) cm	Height / Width / Depth (exterior) cm	Shelves positions	Power W	Weight Kg
2001246	19	30 25 25	50 60 44	5	150	26
2001247	36	40 30 30	60 65 49	7	225	36
2001616	52	33 47 33	53 82 52	5	250	46
2001248	80	50 40 40	70 74 59	8	300	54
2001249	150	50 60 50	70 95 68	8	525	75

### SPARES

Shelves and guides.

Oven Part No.	2001246	2001247	2001616	2001248	2001249
Guides (2) (Set)	2000011	2000012	2000012	2000013	2000015
Shelves	2000021	2000022	2000024	2000023	2000025

Each self requires two guides i.e. one set.

### ACCESSORIES



4120131 USB adapter model.

Pen-Drive included (Memory board) for data storage.

Accessories must be factory installed.



2000016 Digital printer for time and temperature with numerical printout on continuous paper roll, with print intervals from 1 minute to 99 hours.